


TARUS FASSADE UNI 2SK

HIGHLY DIFFUSIVE VAPOR-PERMEABLE FACADE FOIL



DODAVATEL PRO DŘEVOSTAVBY A STŘEŠNÍ KONSTRUKCE

- exceptionally sticky universal adhesive tape
- suitable for creating airtight and waterproof joints
- for outdoor use

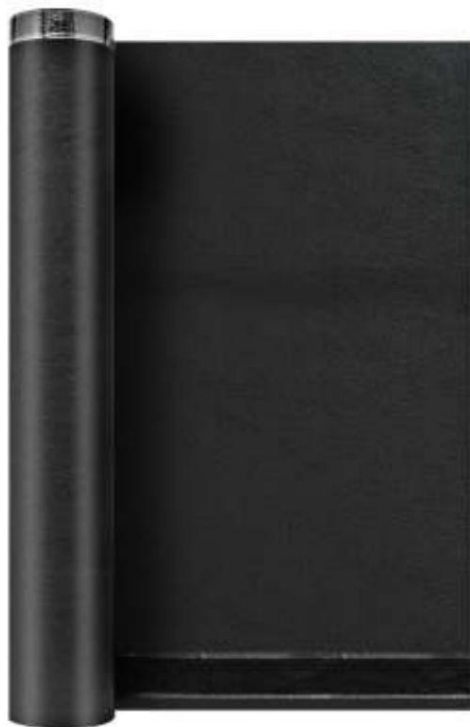

Use of TARUS FASSADE UNI 2SK

The **TARUS FASSADE UNI 2SK** facade foil is a highly diffuse contact facade membrane (additional waterproofing layer and wind barrier) with two tapes on the edges for easy and functional tape-to-tape connection.

- Material suitable for ventilated facades with open joints with a share of open joints of max. 30% of the facade area and a joint width of up to 30 mm for horizontal joints and up to 20 mm for vertical joints.
- It can be used as a non-contact or contact membrane on full planks formwork or thermal insulation.
- When glued together, it acts as a wind barrier.

Application:

- Exterior orientation: by coating (smooth glossy surface).
- Interior orientation: non-woven fabric.
- Horizontal installation: the upper strip overlaps the lower one.
- Recommended temperature: +5° and above.

Notice:

The proportion of open joints is max. 30% of the facade area and the joint width is up to 30 mm for horizontal joints and up to 20 mm for vertical joints.

Packaging: 75m / Roll width 1.5m / Roll length 50m



TOP product, 10-year system warranty



- UV resistance



- Extreme stickiness of integrated adhesive strips



- Resistance to impregnating agents and oils



- 2 adhesive strips

Recommended products:

- TARUS TAPE EXTREME
- BOSTITCH hammer or hand stapler
- TAJIMA cutting knife
- TAJIMA tape measure



13 | 1390 | EN 13859-1 - 2010 | Sheets and membranes for waterproofing - Definitions and characteristics of sheets and membranes for underlayment and back-up waterproofing | Part 1: Sheets and membranes for underlayment and back-up waterproofing for sheet roofing. | Part 2: Sheets and membranes for underlayment and back-up waterproofing for walls. | Unique product type identification code: TARUS FASSADE UNI 2SK
Manufacturer: TARUS obchodní služby sro | Nedvědova 389/2, Povel, 779 00 Olomouc, Czech Republic.
www.tarus.cz | Declaration of Performance No. TRS150CZ01

MORE INFORMATION:



TARUS business services sro

Nedvedova 389/2

779 00 Olomouc

Phone: +420 601 505 323

Email: obchod@tarus.cz

Website: www.tarus.cz



TECHNICAL DATA SHEET

TARUS FASSADE UNI 2SK

HIGHLY DIFFUSIVE VAPOR-PERMEABLE FACADE FOIL

- exceptionally sticky universal adhesive tape
- suitable for creating airtight and waterproof joints
- for outdoor use



FEATURES	UNIT	VALUE	TOLERANCE		TECH SPECS.
Length	(m)	50	-	-	EN 1848-2
Width	(m)	1.5	-0.5%	+0.5%	EN 1848-2
Straightforwardness	-	suits	-	-	EN 1848-2
Weight per unit area	(g/m ²)	210	-20	+20	EN 1849-2
Obvious defects		without obvious defects			EN 1850-2
Reaction to fire	(class)	B	-	-	EN 13501; EN 11925-2
Resistance to water penetration	(class)	W1	-	-	EN 1928
Resistance to water penetration after artificial aging*	(class)	W1	-	-	EN 13859-1,2 annex C
Vapor permeability (equivalent diffusion thickness)	(m)	0.1	-0.05	+0.05	EN 12572
Tensile strength in longitudinal/transverse direction	(N/50mm)	380 / 420	-60 / -80	+60 / +80	EN 12311-1; EN 13859-1,2
Tensile strength after artificial aging in longitudinal / transverse direction	(N/50mm)	340 / 380	-60 / -80	+80 / +100	EN 13859-1,2 annex C
Elongation in longitudinal/transverse direction	(%)	40 / 55	-20 / -25	+20 / +20	EN 12311-1; EN 13859-1,2
Elongation after artificial aging in longitudinal/transverse direction	(%)	35 / 50	-20 / -20	+20 / +20	EN 13859-1,2 annex C
Tear resistance in longitudinal/transverse direction	(N)	220 / 210	-60 / -50	+80 / +60	EN 12311-1; EN 13859-1,2
Dimensional stability	(%)	<1	-	-	EN 1107-2
Flexibility at low temperatures	(°C)	-30	-	-	EN 1109
Air permeability	(m ³ /m.h. ² 50Pa)	<0.08	-	-	EN 12114, EN 13859-2
Temperature range of use	(°C)	-40 / +80	-	-	-
Water column	(cm)	>300	-	-	EN ISO 811
Horizontal open joint	(mm)	30			
Open vertical joint	(mm)	20			
Maximum proportion of open joints	(%)	30			

* - UV artificial aging test performed 5000 h (standard is only 336 h)



TOP product, 10-year system warranty



- UV resistance



- Extreme stickiness of integrated adhesive strips



- Resistance to impregnating agents and oils



- 2 adhesive strips

MORE INFORMATION:



TARUS business services sro
Nedvedova 389/2
779 00 Olomouc

Phone: +420 601 505 323
Email: obchod@tarus.cz
Website: www.tarus.cz

 **TARUS**